

## ■ Molded core pins and guide pins for optical fiber connectors (integrated processing)


### ■ For single core (Material: carbide)

Tip length  $l = 20 \text{ mm}$   
 Tip shape and cylindricity tolerance  $= \pm 0.5 \text{ } \mu\text{m}$   
 Tip dimensions  $= \text{from } \varnothing 0.100 \text{ mm}$



### ■ Mold guide pin (Material: carbide, SKH)

Tip length  $l = 30 \text{ to } 40 \text{ mm}$   
 (Effective length approximately  $20 \text{ mm}$ )  
 Dimensions  $= \varnothing 0.7010 \text{ mm etc.}$   
 Dimensional tolerance  $= \pm 0.1 \text{ } \mu\text{m}$



### ■ For multi-core (Material: carbide, SKH)

Tip length  $l = 4 \text{ to } 5 \text{ mm}$   
 Tip shape and cylindricity tolerance  $= \pm 0.1 \text{ } \mu\text{m}$   
 Tip dimensions  $= \text{from } \varnothing 0.08 \text{ mm}$



## ■ Mating pins for optical fiber connectors

### ■ For MT type

Precision (tolerance)  
 Example:  $\pm 0.5 \text{ } \mu\text{m}$




(Range)  $0.5 \text{ } \mu\text{m}$




$\pm 0.15 \text{ } \mu\text{m}$




$\pm 0.1 \text{ } \mu\text{m}$

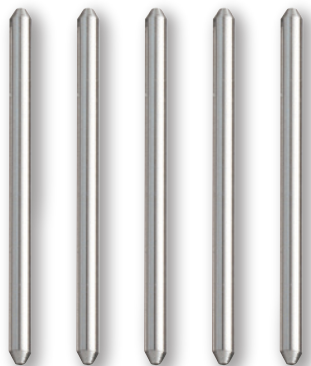

### ■ For MT-RJ type

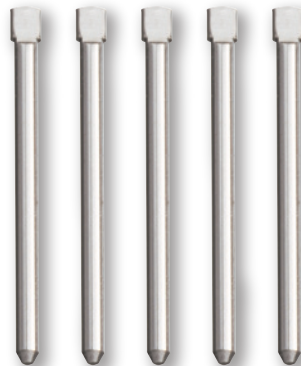

Flanged

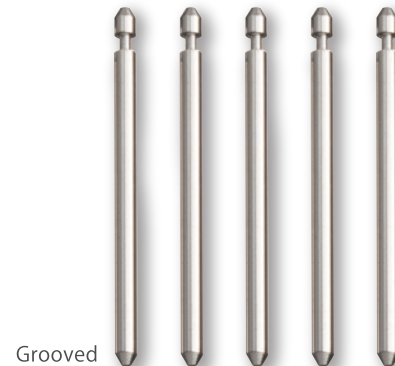

Grooved